

# RoHS

Compatible

CUSTOMER

PART NO

REV.

A


ORDER NO

New Release

DATE

2017.07.21

B

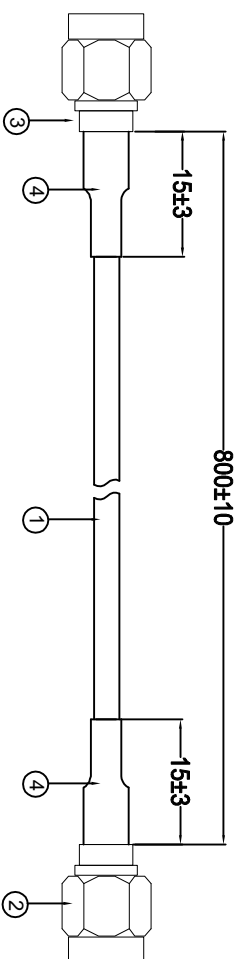

Note:

1. Electrical Properties
  - 1.1 Frequency Range: DC-3GHz
  - 1.2 Impedance: 50Ω
  - 1.3 VSWR: <1.5 @ 0.1GHz ~ 3GHz,
2. Mechanical Properties
  - 2.1 Pull Force: >3Kg For SMA Connector.
3. Package: Bulk Package

NO	PARTNAME	DESCRIPTION	Q.TY
1	Cable	RG 174 Coaxial Cable, Black	/
2	Connector	RP-SMA Male, Nickel Plated	2
3	Tube	Heat Shrink Tube, Black, Ø4.0	2
4			



东莞市博戈斯通信科技有限公司  
Dongguan Boges Communication Technology Co., Ltd

PART NAME: SMA Cable, Male To female, L=800M

PART NO.:BGS-SMAM-174-SMAM-0800 DATE:2017-07-21

APPROVED BY CHECKED BY DESIGNED BY

Jim. Yang

Zhang Yong

Rain. Li

UNITS: mm  
SCALE: None  
REVISION: A

Tolerance  
X.X ±0.50  
X.XX±0.15  
X° ±3°

A

B

C

D

E

2

3

4

5

6

7

8