


RoHS
Compatible

CUSTOMER
PART NO

REV.	ORDER NO	DATE
/A	New Release	2017.04.10
/B		

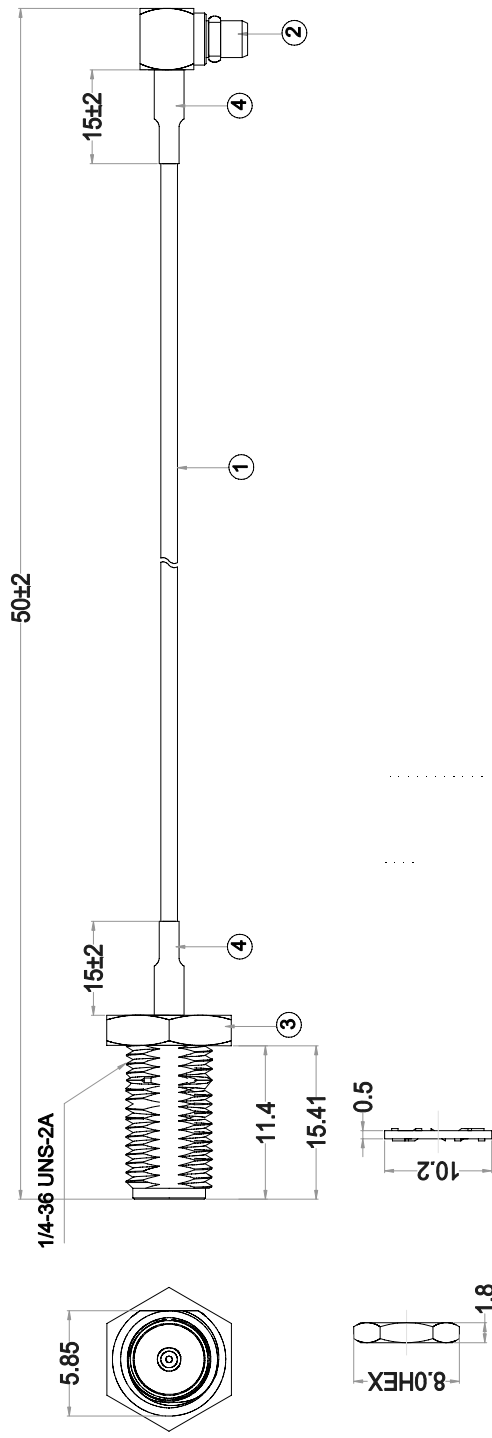

Note:

- Electrical Properties
 - 1.1 Frequency Range: DC-6GHz
 - 1.2 Impedance: 50Ω
 - 1.3 VSWR: <1.3 @ 0.1GHz ~ 3GHz, <1.5 @ 3GHz ~ 6GHz.
- Mechanical Properties
 - 2.1 Pull Force: >3.0Kg For MMCX Connector
 - 2.2 Pull Force: >3Kg For SMA Connector.
- Package: Bulk Package

BCS
东莞市博戈斯通信科技有限公司
Dongguan Boges Communication Technology Co., Ltd

PART NAME: MMCX To SMA Cable, L=50MM

PART NO.: BGS-SMAF-178-MMCXM-0050 **DATE: 2017-04-10**

APPROVED BY	CHECKED BY	DESIGNED BY	Tolerance	
			X.X ±0.50	X° ±3°
Jim. Yang	Zhang.Yong	Rain. Li	UNITS: mm	SCALE: None
			REVISION: A	

NO	PARTNAME	DESCRIPTION	Q.TY
2	Tube	Heat Shrink Tube, Black, Ø3.0	1
2	Connector	SMA Female, Gold Plated	1
2	Connector	MMCX Male, Right Angle, Gold Plated	1
1	Cable	RG-178 Coaxial Cable, Brown.	/
			Q.TY