


**ROHS**  
Compatible

CUSTOMER	
P/N	

REV.	ORDER NO	DATE
A	NEW RELEASE	2016.08.23

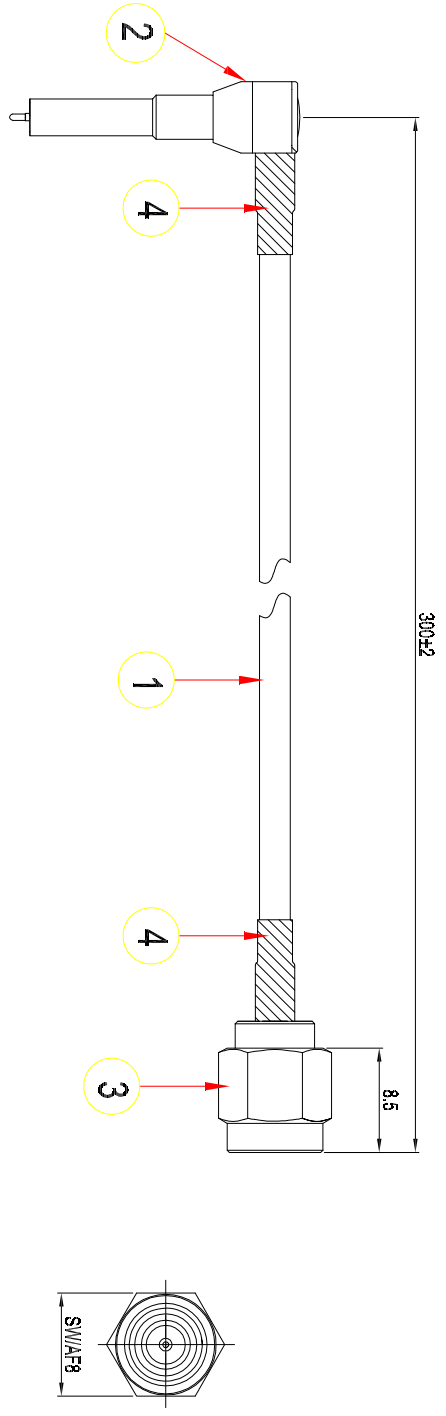

**Note:**

- All Components Are ROHS Compliant.
- Electrical Properties
  - 2.1 Impedance: 50Ω
  - 2.2 VSWR: 1.4Max. @ DC To 3GHz; 1.8Max. @ 3GHz to 6GHz
- Mechanical.
  - 3.1. Pull Strength: 3Kh Min.
- Operating Temperature: -30°C To +70°C
- Storage Temperature: -30°C To +70°C
- Package: 1PC In a PE Bag

4	Tube	Heat Shrink Tube	2
3	Connector	SMA Male, Gold Plated	1
2	Connector	C2 Connector	1
1	Cable	RF 1.37 Cable, Black	1
	Part Number	Description	QTY

东莞市博廣斯通信科技有限公司  
Dongguan Boges Communication Technology Co., Ltd

PART NAME: SMA Male To C2 Connector, RF1.37, L=300MM

PART NO.: BGS-C2-137-SMAM-0300

DATE: 2016-08-23

APPROVED BY: Rain Lee

CHECKED BY: Darren Cheng

DESIGNED BY: Darren Cheng

UNITS: mm  
SCALE: 1/1  
REVISION: A

Tolerance  
X.X ±0.50  
X.XX ±0.15  
X° ±3°